



NAGLEV Series - GWR

Guided Wave Radar Level Transmitter Catalogue



Nagman Flow-Level Systems And Solutions LLP
No. 168/7, Chennai-Bangalore National Highway,
Chembarambakkam, Chennai-6000123, Tamilnadu, India
E-mail Address: sales@nagmanflow.com
Contact No : 044 66777052/53/54/55;
9841003788
Site : www.nagmanflow.com

Product Overview

Reflected pulse signal along the cable or rod probe type transmit to the instrument electronic circuit parts, the microprocessor processes the signal, identify the microwave pulse echo generated in the material surface. Correct identification of the echo signal are completed the implementation by the pulse software, D, the distance from the material surface and the pulse travel time T is proportional:


$$D=C \times T/2$$

Where C is the speed of light

Because the empty distance E is known, the level L is:

$$L=E-D$$

By entering the empty height of E (= zero), full tank height F (= hundred) and the application to set some parameters, application parameters will automatically adapt the instrument to measure the environment, corresponding to the 4-20mA output.

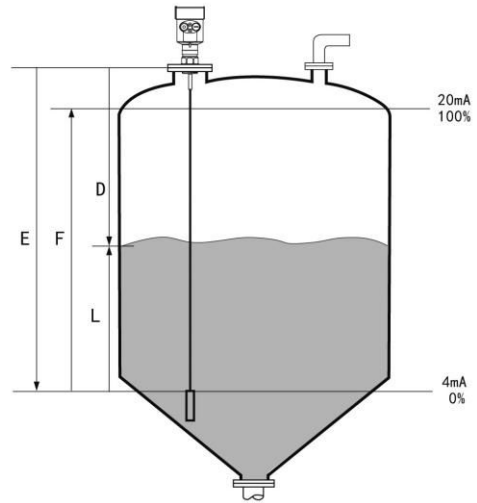

Measuring range:

Explanation:

H--- Measuring range

L---Empty distance


B---The top of the blind

E---The minimum distance from the probe to the tank wall

--Blind spot is the minimum distance between the top of the highest material surface materials and measurement reference point.

--The bottom of the blind refers to a distance near the very bottom of the cable can not be accurately measured.

--Between the top and bottom of the blind is blind effective measure distances.

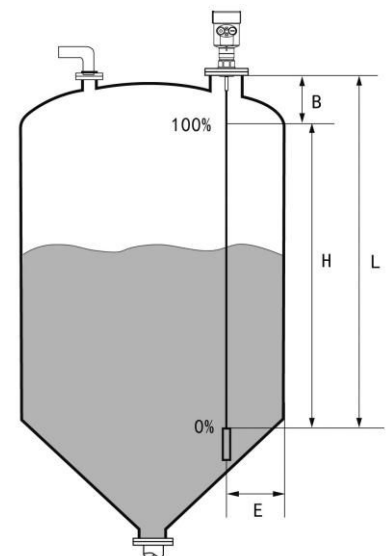

Note:

In order to ensure the accuracy of level measurement, the material should be located between the top and bottom of the blind the blind.

Product Introduction

GWR - 701



Suitable for Medium	Liquid, solid powder
Application	Liquid and solid powder measure, complicated process conditions
Explosion-proof Grade	
Measuring Range	30 meters
Frequency	500MHz-1.8GHz
Antenna	Single cable or single rod antenna
Process Temperature:	(-40~250) °C
Measurement Precision	±10mm
Process Pressure	(-0.1~4)MPa
The signal Output	(4 ~ 20) mA/HART
The Scene Display	Four LCD/can be programmed
Power source	Two wire(DC24V) Four wire(DC24V/AC220V)
Shell	Aluminum
Connection	Flange(optional)/Thread

GWR - 702



Suitable for Medium	Liquid, especially corrosive liquids
Application	Acids, bases or other corrosive media
Explosion-proof Grade	
Measuring Range	20 meters
Frequency	500MHz-1.8GHz
Antenna	Full PTFE sealing cable type or rod antenna
Process Temperature:	(-40~200) °C
Measurement Precision	±10mm
Process Pressure	(-0.1~4)MPa
The signal Output	(4 ~ 20) mA/HART
The Scene Display	Four LCD/can be programmed
Power source	Two wire(DC24V) Four wire(DC24V/AC220V)
Shell	Aluminum
Connection	Flange(optional)/Thread

GWR - 703



Suitable for Medium	Solid powder
Application	Cement silo powder measure; Ash powder measure
Explosion-proof Grade	
Measuring Range	30 meters
Frequency	500MHz-1.8GHz
Antenna	Double cable type antenna
Process Temperature:	(-40~150) °C
Measurement Precision	±10mm
Process Pressure	(-0.1~4)MPa
The signal Output	(4 ~ 20) mA/HART
The Scene Display	Four LCD/can be programmed
Power source	Two wire(DC24V) Four wire(DC24V/AC220V)
Shell	Aluminum
Connection	Flange(optional)/Thread

GWR - 704



Suitable for Medium	Liquids, particularly low dielectric constant liquid
Application	Measuring deionized water, deoxygenated water and other liquids
Explosion-proof Grade	
Measuring Range	6 meters
Frequency	500MHz-1.8GHz
Antenna	Coaxial tube type antenna
Process Temperature:	(-40~250) °C
Measurement Precision	±5mm
Process Pressure	(-0.1~4)MPa
The signal Output	(4 ~ 20) mA/HART
The Scene Display	Four LCD/can be programmed
Power source	Two wire(DC24V) Four wire(DC24V/AC220V)
Shell	Aluminum
Connection	Flange(optional)/Thread

GWR - 705



Suitable for Medium	Liquids, especially high temperature and pressure environment of liquid
Application	Sealed cans, greater pressure liquid measurement
Explosion-proof Grade	
Measuring Range	15 meters
Frequency	500MHz-1.8GHz
Antenna	Single cable or single rod antenna
Process Temperature:	(-40~400) °C
Measurement Precision	±10mm
Process Pressure	(-0.1~40)MPa
The signal Output	(4 ~ 20) mA/HART
The Scene Display	Four LCD/can be programmed
Power source	Two wire(DC24V) Four wire(DC24V/AC220V)
Shell	Aluminum
Connection	Flange(optional)/Thread

Product Model Selection

GWR - 701

Maximum Range / Type of detecting component
30000mm/ Single cable type or 6000mm / single rod type
Explosion Proof Approval
P Standard (Without Approval)
Type of detecting component /Material
A cable Φ8mm / Stainless Steel 304
B cable Φ4mm / Stainless Steel 316L
C rod Φ10mm / Stainless Steel 304
D rod Φ10mm / Stainless Steel 316L
Process Connection /Material
G Thread G1½" A
N Thread 1½" NPT
C Flange DN50 PN16C / Stainless Steel
D Flange DN80 PN16C / Stainless Steel
E Flange DN100 PN16C / Stainless Steel
F Flange DN150 PN16C / Stainless Steel
H Flange DN200 PN16C / Stainless Steel
I Flange 2" 150LBS ANSI Convex / Stainless Steel 316L
J Flange 3" 150LBS ANSI Convex / Stainless Steel 316L
K Flange 4" 150LBS ANSI Convex / Stainless Steel 316L
L Flange 6" 150LBS ANSI Convex / Stainless Steel 316L
M Flange 8" 150LBS ANSI Convex / Stainless Steel 316 L
Seal / Process Temperature
1. Normal (-40~130)°C
2. High Temperature (-40~250)°C
Shell / Protection Class
L Aluminum /IP67
Q Plastic /IP65
Cable Entry
M M 20 x 1.5
N ½" NPT
Display
V With
X Without
Programming
V With
X Without

GWR - 702

Maximum Range / Type of detecting component	
20000mm / Full PTFE sealing cable type or 6000mm / Full PTFE sealing rod type	
Explosion Proof Approval	
P Standard (Without Approval)	
Type of detecting component /Material	
A cable Φ4mm / PTFE C rod Φ10mm / PTFE	
Process Connection /Material	
G	Thread G1½" A
N	Thread ½" NPT
C	Flange DN50 PN16C / Stainless Steel /PTFE
D	Flange DN80 PN16C / Stainless Steel /PTFE
E	Flange DN100 PN16C / Stainless Steel /PTFE
F	Flange DN150 PN16C / Stainless Steel /PTFE
H	Flange DN200 PN16C / Stainless Steel /PTFE
I	Flange 2" 150LBS ANSI Convex / Stainless Steel 316L/PTFE
J	Flange 3" 150LBS ANSI Convex / Stainless Steel 316L /PTFE
K	Flange 4" 150LBS ANSI Convex / Stainless Steel 316L/PTFE
L	Flange 6" 150LBS ANSI Convex / Stainless Steel 316L/PTFE
M	Flange 8" 150LBS ANSI Convex / Stainless Steel 316 L /PTFE
Seal / Process Temperature	
1. Normal (-40~130)°C 2. High Temperature (-40~200)°C	
Shell / Protection Class	
L	Aluminum /IP67
Q	Plastic /IP65
Cable Entry	
M	M 20 x 1.5
N	½" NPT
Display	
V	With
X	Without
Programming	
V	With
X	Without

GWR - 703

Maximum Range / Type of detecting component
30000mm / Double cable type
Explosion Proof Approval
P Standard (Without Approval)
Type of detecting component /Material
A cable Φ6mm / Stainless Steel 304 B cable Φ6mm / Stainless Steel 316L
Process Connection /Material
G Thread G1½" A N Thread 1½" NPT C Flange DN50 PN16C / Stainless Steel D Flange DN80 PN16C / Stainless Steel E Flange DN100 PN16C / Stainless Steel F Flange DN150 PN16C / Stainless Steel H Flange DN200 PN16C / Stainless Steel I Flange 2" 150LBS ANSI Convex / Stainless Steel 316L J Flange 3" 150LBS ANSI Convex / Stainless Steel 316L K Flange 4" 150LBS ANSI Convex / Stainless Steel 316L L Flange 6" 150LBS ANSI Convex / Stainless Steel 316L M Flange 8" 150LBS ANSI Convex / Stainless Steel 316 L
Seal / Process Temperature
Normal (-40~150)°C
Shell / Protection Class
L Aluminum /IP67 Q Plastic /IP65
Cable Entry
M M 20 x 1.5 N ½" NPT
Display
V With X Without
Programming
V With X Without

GWR - 704

Maximum Range / Type of detecting component	
6000mm / Coaxial tube type antenna	
Explosion Proof Approval	
P Standard (Without Approval)	
Type of detecting component /Material	
A Coaxial tube Φ25mm / Stainless Steel 304	
B Coaxial tube Φ25mm / Stainless Steel 316L	
Process Connection /Material	
G Thread G½" A	
N Thread 1½" NPT	
C Flange DN50 PN16C / Stainless Steel	
D Flange DN80 PN16C / Stainless Steel	
E Flange DN100 PN16C / Stainless Steel	
F Flange DN150 PN16C / Stainless Steel	
H Flange 2" 150LBS ANSI Convex / Stainless Steel 316L	
I Flange 3" 150LBS ANSI Convex / Stainless Steel 316L	
J Flange 4" 150LBS ANSI Convex / Stainless Steel 316L	
K Flange 6" 150LBS ANSI Convex / Stainless Steel 316L	
L Special Design	
Seal / Process Temperature	
1. Normal (-40~130)°C	
2. High Temperature (-40~250)°C	
Shell / Protection Class	
L Aluminum /IP67	
Q Plastic /IP65	
Cable Entry	
M M 20x1.5	
N ½" NPT	
Display	
V With	
X Without	
Programming	
V With	
X Without	

GWR - 705

Maximum Range / Type of detecting component	
15000mm / Single cable type	or 6000mm/ single rod type
Explosion Proof Approval	
P	Standard (Without Approval)
Type of detecting component /Material	
A	cable Φ8mm / Stainless Steel 304
B	cable Φ8mm / Stainless Steel 316L
C	rod Φ10mm / Stainless Steel 304
D	rod Φ10mm / Stainless Steel 316L
Process Connection /Material	
G	Thread G1½" A
N	Thread ½" NPT
C	Flange DN50 PN16C / Stainless Steel
D	Flange DN80 PN16C / Stainless Steel
E	Flange DN100 PN16C / Stainless Steel
F	Flange DN150 PN16C / Stainless Steel
H	Flange DN200 PN16C / Stainless Steel
I	Flange 2" 150LBS ANSI Convex / Stainless Steel 316L
J	Flange 3" 150LBS ANSI Convex / Stainless Steel 316L
K	Flange 4" 150LBS ANSI Convex / Stainless Steel 316L
L	Flange 6" 150LBS ANSI Convex / Stainless Steel 316L
M	Flange 8" 150LBS ANSI Convex / Stainless Steel 316L
Seal / Process Temperature	
1. Normal (-200~400)°C	
Shell / Protection Class	
L	Aluminum /IP67
Q	Plastic /IP65
Cable Entry	
M	M 20 x 1.5
N	½" NPT
Display	
V	With
X	Without
Programming	
V	With
X	Without